


		INCH	MM
CROWN WHEEL BOLT PCD	D1	6.929	176.0
No. OF BOLTS		12	12
THREAD / THRO' HOLE		0.492	12.5
CROWN WHEEL SPIGOT DIA	D2	5.7475	146.0
BEARING DIA	D3	2.1669	55.0
BEARING DISTANCE	L1	5.198	132.0
SPIGOT LENGTH	L2	0.964	24.5
	L2/A	0.983	25.0
OVERALL LENGTH	L3	7.145	181.5
BEARING/CROWN WHEEL	L4	1.219	31.0
BORE	D4	1.575	40.0

DRIVE SHAFT SPLINE:-

No. OF TEETH	31
PITCH	
TYPE	
PRESSURE ANGLE	

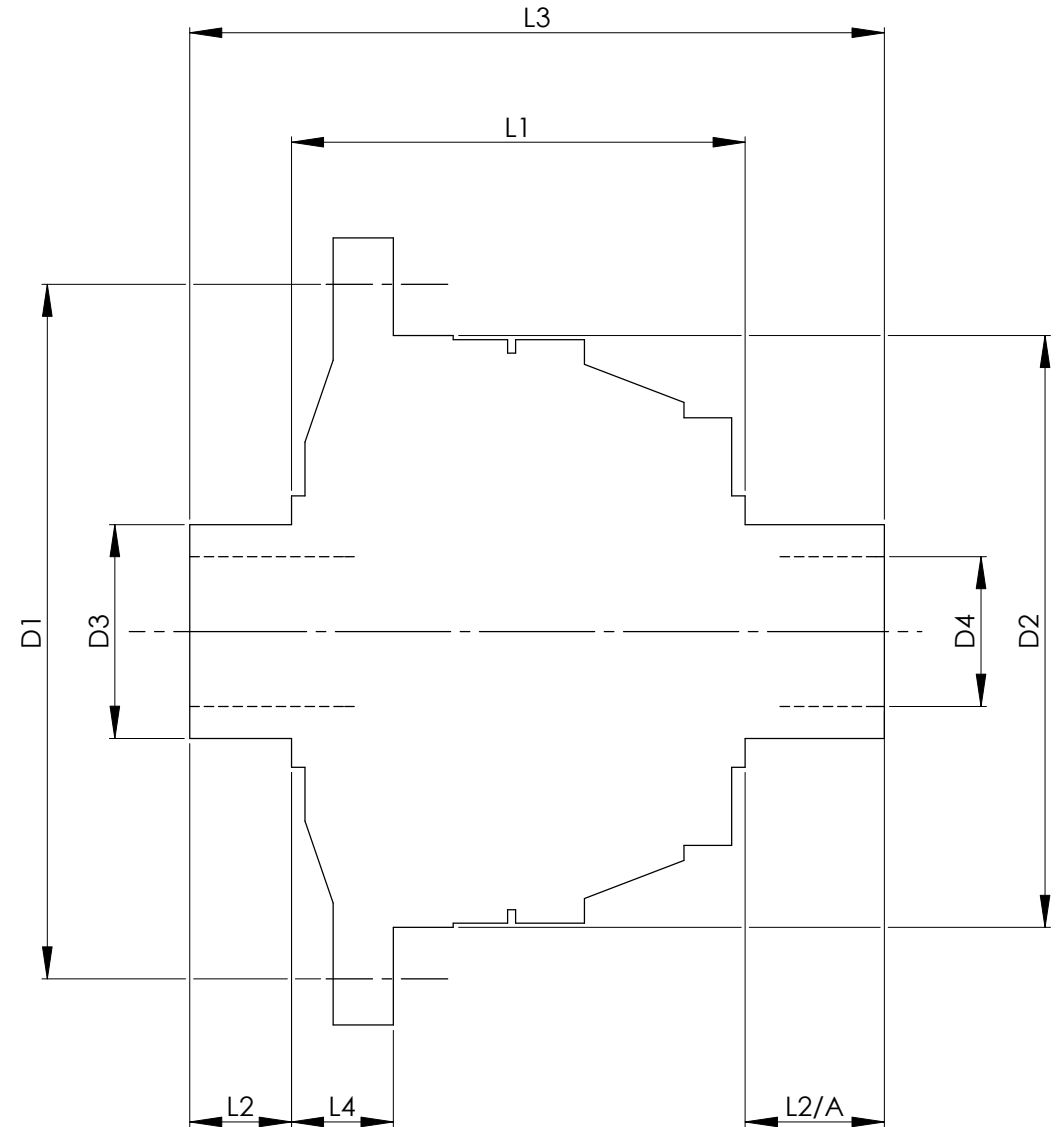

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF12L

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF R.T. QUAIFF ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. ± 1/64".	
DEC. ± 0.005".	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 31.3.06	
DRAWN BY. J.P.D.	

Used In. NISSAN R230