

Drg No. QDF14Q

REMOVE ALL BURRS AND SHARP EDGES.

THIRD ANGLE PROJECTION.

		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.905	150
No. OF BOLTS		12	12
THREAD / THRO' HOLE		0.495	12.6
CROWN WHEEL SPIGOT DIA	D2	4.7645	121.0
BEARING DIA	D3	1.9691	50.0
BEARING DISTANCE	L1	5.335	135.5
SPIGOT LENGTH	L2	0.870	22.1
	L2/A	0.795	20.2
OVERALL LENGTH	L3	7.000	177.8
BEARING/CROWN WHEEL	L4	0.425	10.8
BORE	D4	1.3786	35.0

DRIVE SHAFT SPLINE:-


No. OF TEETH

PITCH

TYPE

PRESSURE ANGLE

43	
32/64 DP	
FILLET ROOT	SIDE FIT
45 DEG	

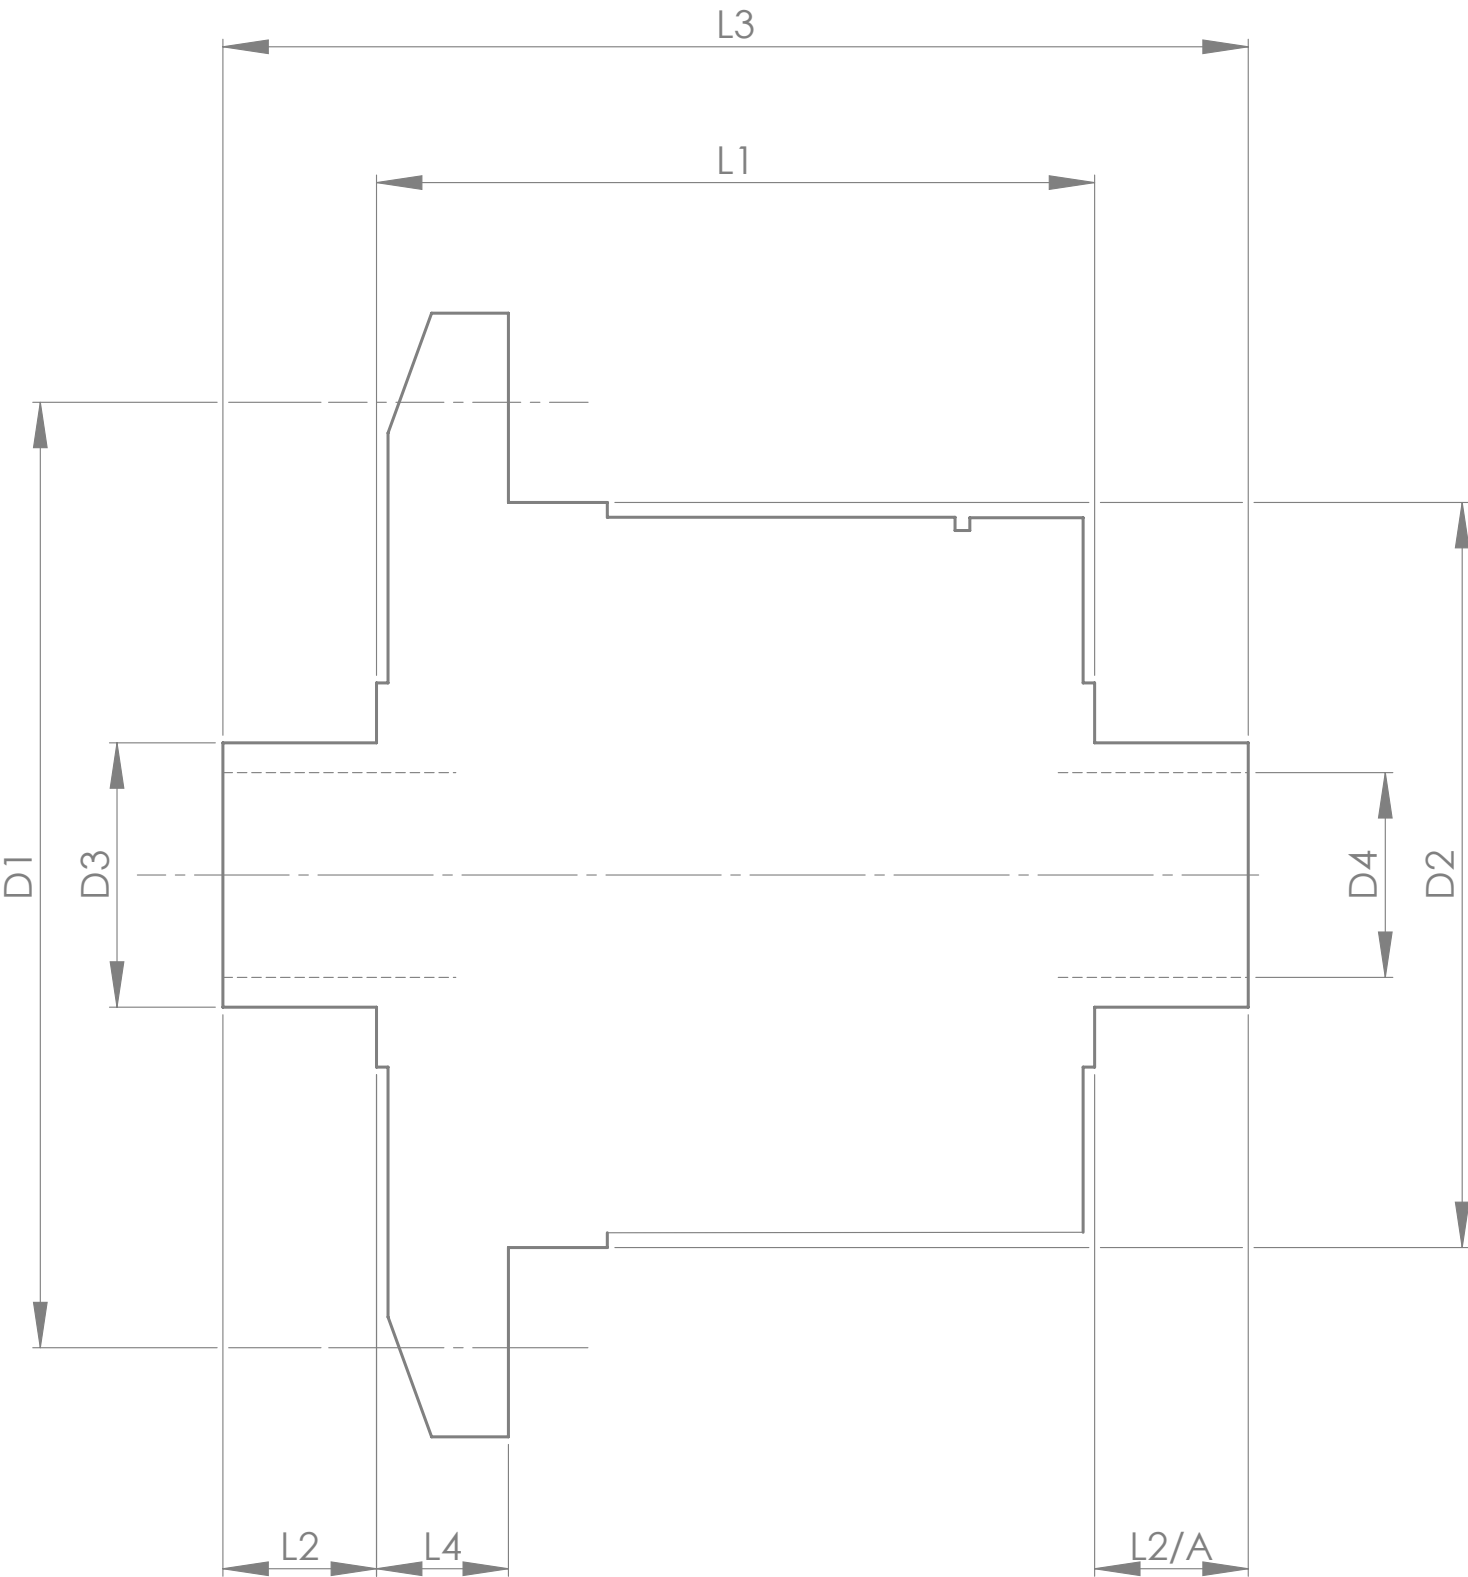

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF14Q

NOTE:- SIMILAR TO QDF7Q BUT WITH FLANGE RETAINERS

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
THE EXCLUSIVE PROPERTY OF
R.T.QUAIFE ENGINEERING LTD.
AND MAY NOT BE USED COPIED OR EXHIBITED
WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01	DATE. 6.2.09
DRAWN BY. J.P.D.	
Used In.	PORSCHE 996 Turbo 2000-2004 PORSCHE GT2/GT3

SOLID WORKS