


		INCH	MM
CROWN WHEEL BOLT PCD	D1	6.2577	158.945
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.516	13.1
CROWN WHEEL SPIGOT DIA	D2	5.1965	131.99
BEARING DIA	D3	2.2534	57.236
BEARING DISTANCE	L1	6.480	164.59
SPIGOT LENGTH	L2	0.818	20.78
	L2/A	0.798	20.27
OVERALL LENGTH	L3	8.096	205.64
BEARING/CROWN WHEEL	L4	2.912	73.96
BORE	D4	1.3994	35.54
DRIVE SHAFT SPLINE:-			
No. OF TEETH		24	
PITCH		20/40 DP	
TYPE		FLAT ROOT	SIDE FIT
PRESSURE ANGLE		30	

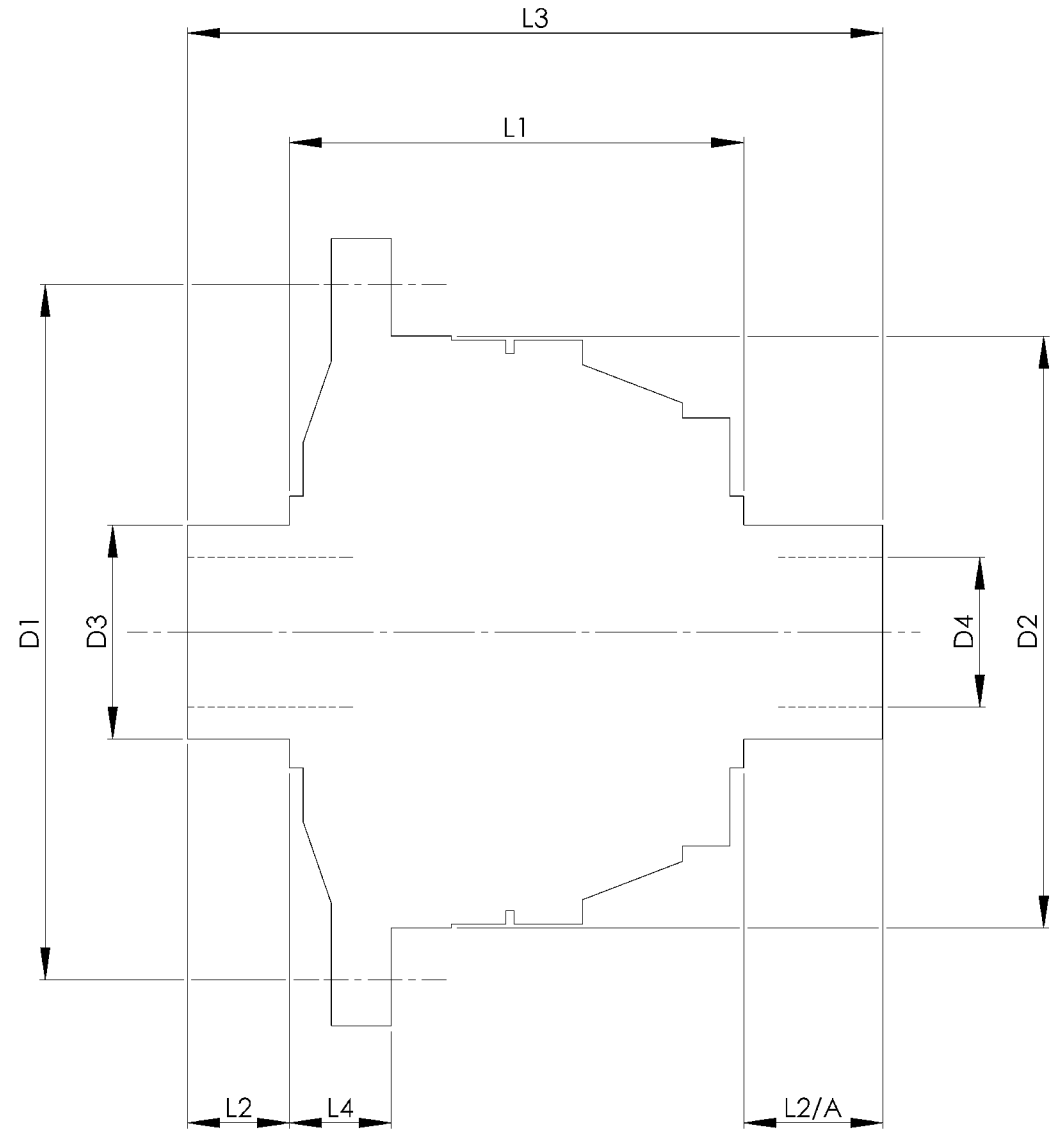

TITLE F.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

**Drg. No. QDF22B2**

**Quaife Design & Development.**

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF RUTLAND TECHNOLOGIES. IT IS TO BE KEPT SECRET AND NOT REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF RUTLAND TECHNOLOGIES.

FINISH. MACH, GRIND@G  
 LIMITS. FRACT. ± 1/64".  
 DEC. ± 0.005".  
 MATERIAL.  
 TREATMENT.  
 ISSUE. 01 DATE. 29.3.06  
 DRAWN BY. M.L.M.

**Used In. CORVETTE**