


		INCH	MM
CROWN WHEEL BOLT PCD	D1	6.000	152.4
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.472	12
CROWN WHEEL SPIGOT DIA	D2	5.0005	127.0
BEARING DIA	D3	1.783	45.3
BEARING DISTANCE	L1	5.504	139.8
SPIGOT LENGTH	L2	0.866	22.0
	L2/A	0.830	21.1
OVERALL LENGTH	L3	7.200	182.9
BEARING/CROWN WHEEL	L4	1.500	38.1
BORE	D4	1.350	34.3
DRIVE SHAFT SPLINE:-			
No. OF TEETH		31	
PITCH			
TYPE			
PRESSURE ANGLE			

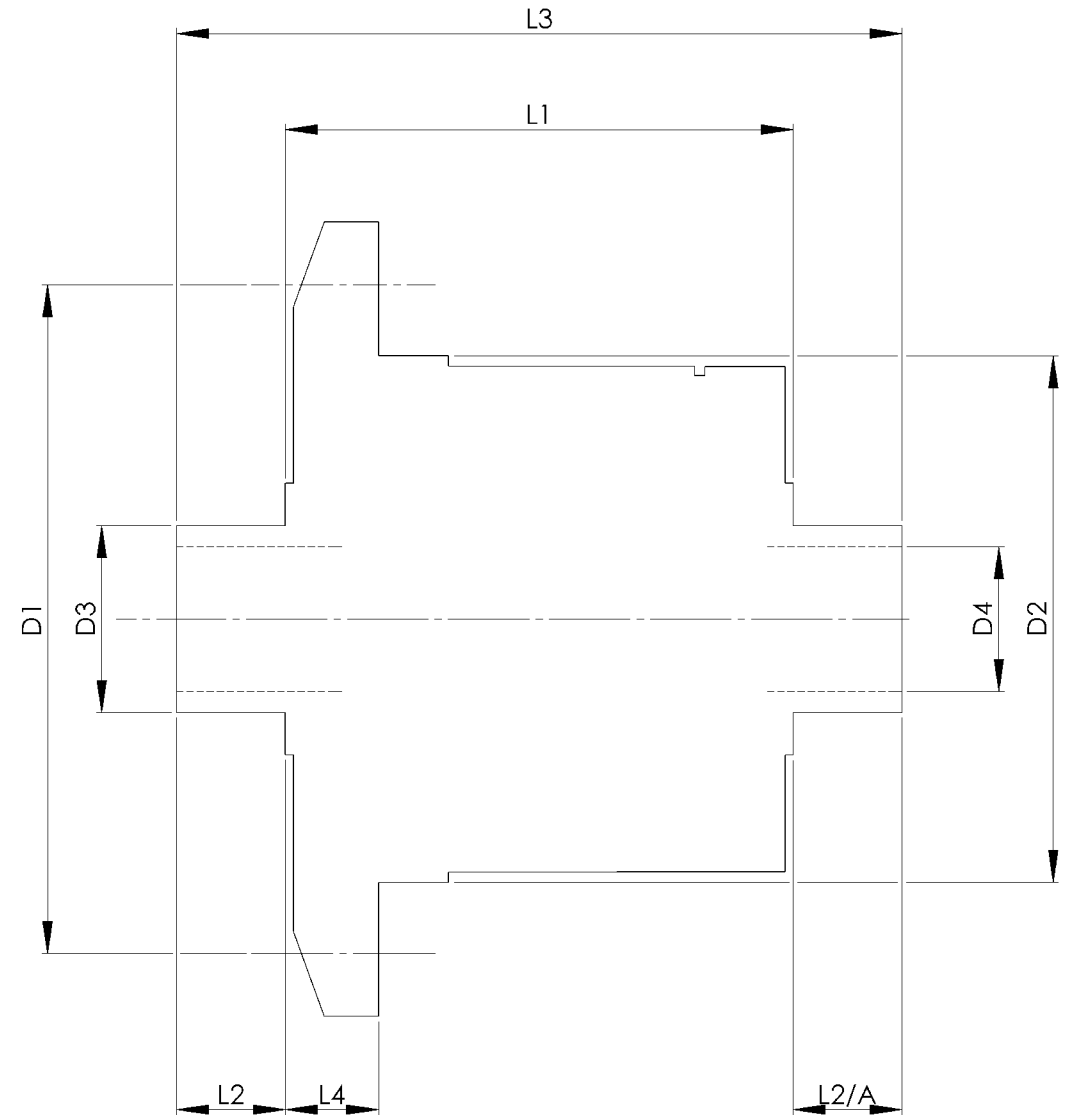

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDH1R

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE SOLE PROPERTY OF RUTLAND TECHNOLOGIES. IT IS NOT TO BE REPRODUCED, COPIED, EITHER WHOLLY OR PARTIALLY, OR IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF RUTLAND TECHNOLOGIES.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64"	
DEC. ± 0.005"	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 17.5.05	
DRAWN BY. M.L.M.	

Used In. FORD (USA) 9" LIVE AXLE