


		INCH	MM
CROWN WHEEL BOLT PCD	D1	4.567	116
No. OF BOLTS		8	8
THREAD / THRO' HOLE		M12x1.25	M12x1.25
CROWN WHEEL SPIGOT DIA	D2	3.779	96.0
BEARING DIA	D3	1.6266	41.3
BEARING DISTANCE	L1	4.150	105.4
SPIGOT LENGTH	L2	0.775	19.7
	L2/A	0.775	19.7
OVERALL LENGTH	L3	5.700	144.8
BEARING/CROWN WHEEL	L4	0.700	17.8
BORE	D4	1.122	28.5
DRIVE SHAFT SPLINE:-			
No. OF TEETH		27	
PITCH		1 MOD.	
TYPE			
PRESSURE ANGLE		45 DEG	

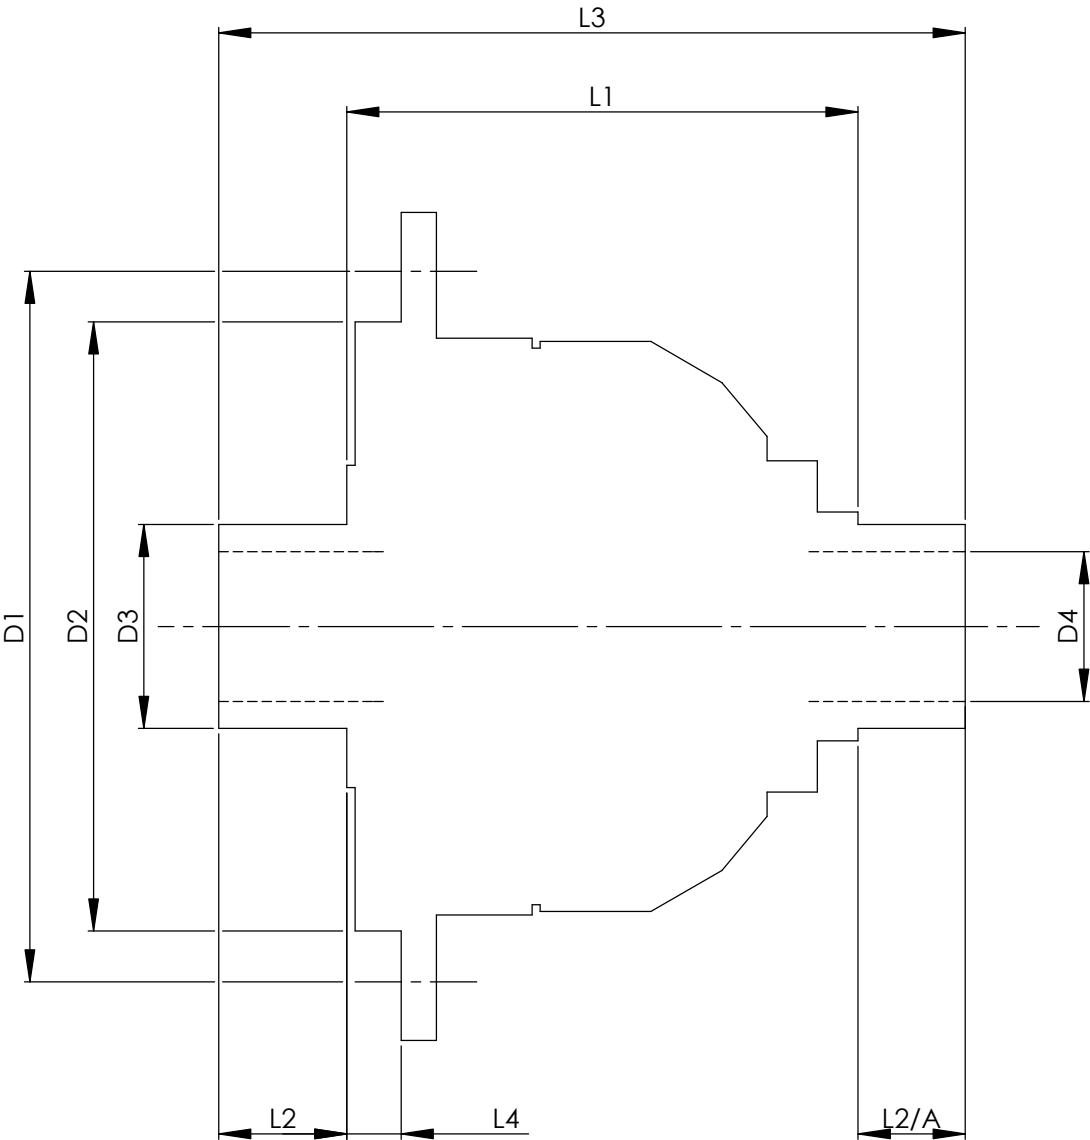

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDH7B

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
THE EXCLUSIVE PROPERTY OF
R.T. SQUARE ENGINEERING LTD.
AND MAY NOT BE USED COPIED OR EXHIBITED
WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 19.5.05	
DRAWN BY. M.L.M.	
Used In.	MITSUBISHI ECLIPSE 2WD Turbo